


CM2-005 PURCHASED CONTINUOUS ANTI-SLIP RING

SHEET 1/1 · NOT TO SCALE

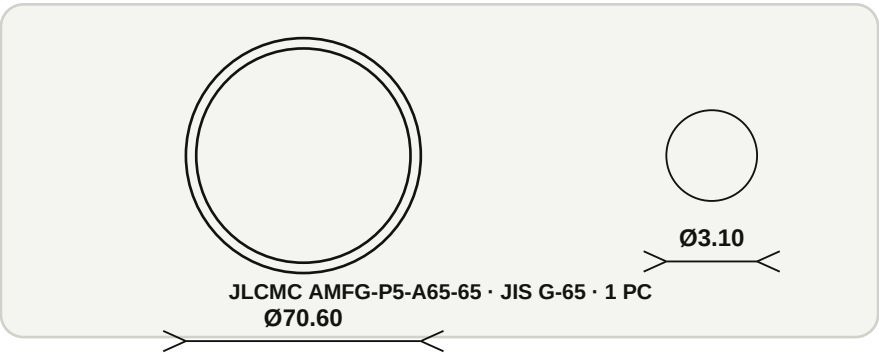

Supplier / P/N	JLCMC AMFG-P5-A65-65; JIS B 2401 G-65; use 1
Inner diameter	Ø64.40 ±0.57 mm
Cross section	Ø3.10 ±0.10 mm; nominal OD Ø70.60 mm
Retention groove	Ø67.50 centerline × 3.60 wide × 2.20 deep
Installed protrusion	0.90 mm nominal; groove-to-counterbore land 2.95 mm
Live price	\$0.1522 each, in stock on 2026-07-17
Base screw set	1× M2.5×8, 2× M2.5×12, 1× M2.5×16; ISO 10642

MATERIAL

Black nitrile rubber (NBR), 65 Shore A

FINISH

As supplied; captured mechanically, no adhesive.

MANUFACTURING NOTES

- This one continuous ring replaces both the rejected TPU part and discrete feet.
- Install after anodizing: clean and dry the groove, seat evenly, and remove all twist.
- No glue, printing, trimming, or rubber fabrication is required.
- Purchase: jlcmc.com/product/s/A05/AMFG/o-ring-g-series

ACCEPTANCE: VERIFY SUPPLIER PART NUMBER AND GROOVE FIT

Vendor STEP is a fit reference only; purchase the exact JLCMC part listed above.